


Construction drawings

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Floor framing plan

1:50 · imperial

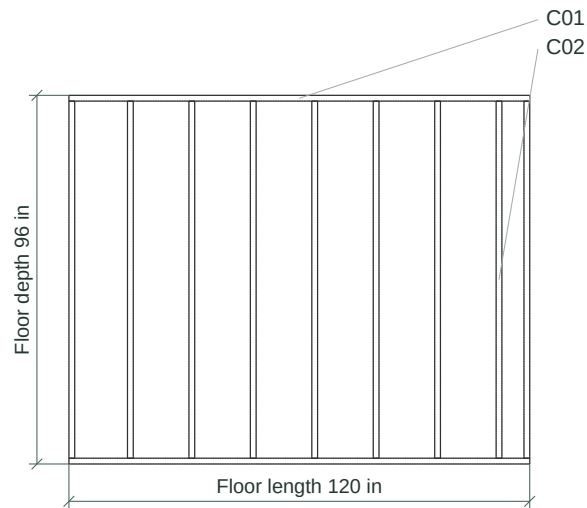


Shed Front framing elevation

1:75 · imperial

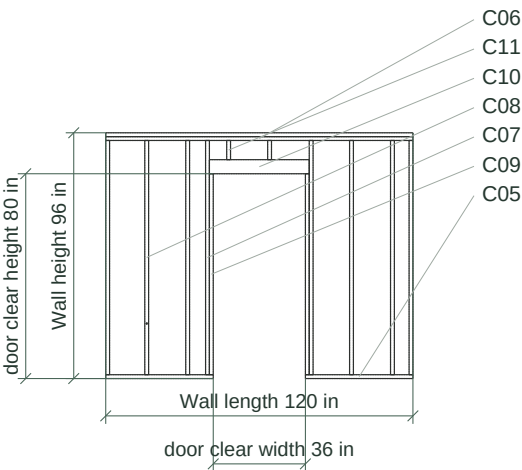


Shed Front sheathing

1:50 · imperial

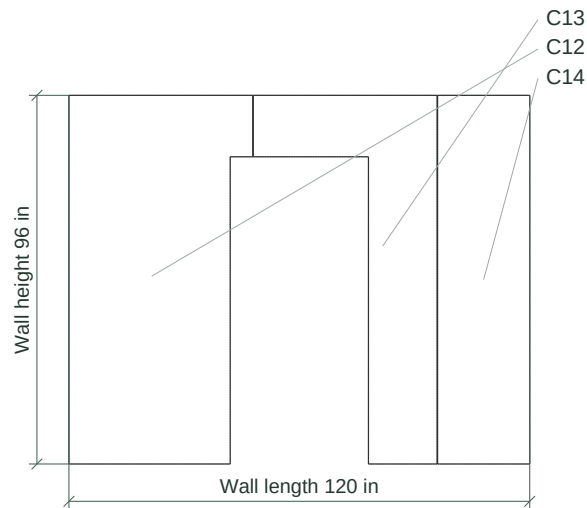

Shed Back framing elevation

1:75 · imperial

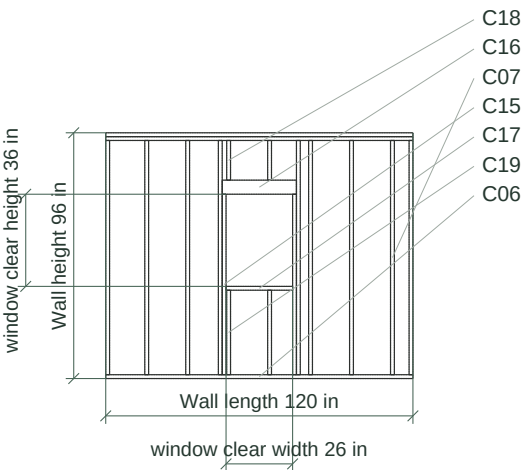

Scale check: this line is exactly 4 in on the page.


Construction drawings

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Shed Back sheathing

1:50 · imperial

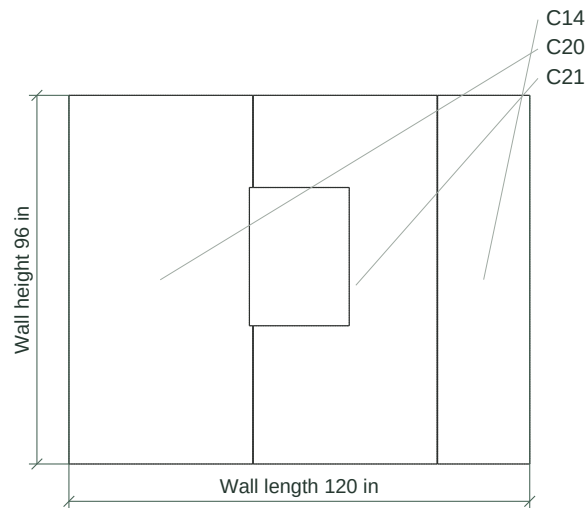


Shed Left framing elevation

1:40 · imperial

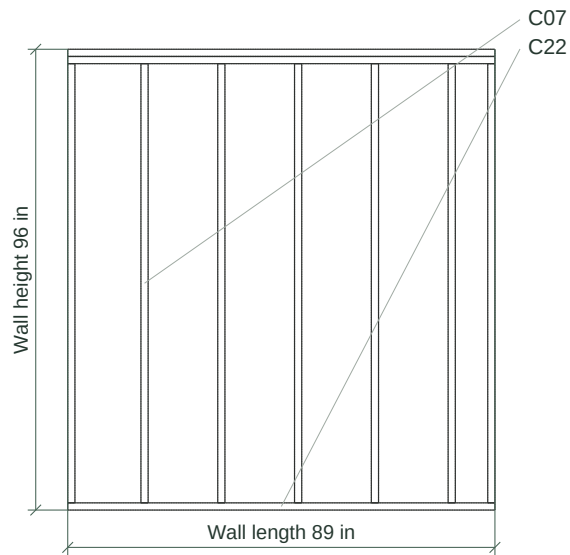


Shed Left sheathing

1:40 · imperial

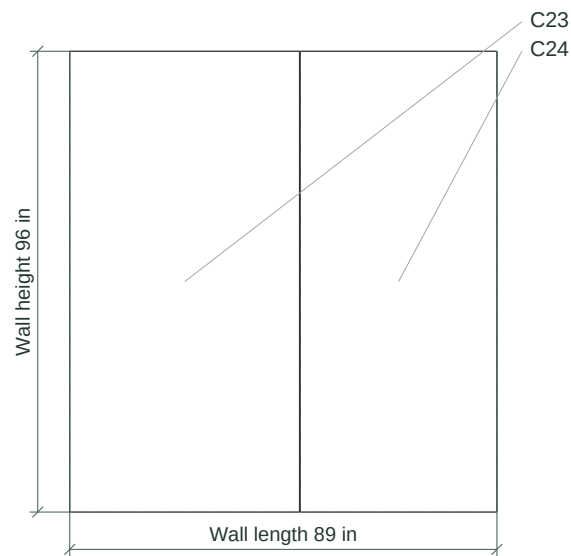

Shed Right framing elevation

1:40 · imperial

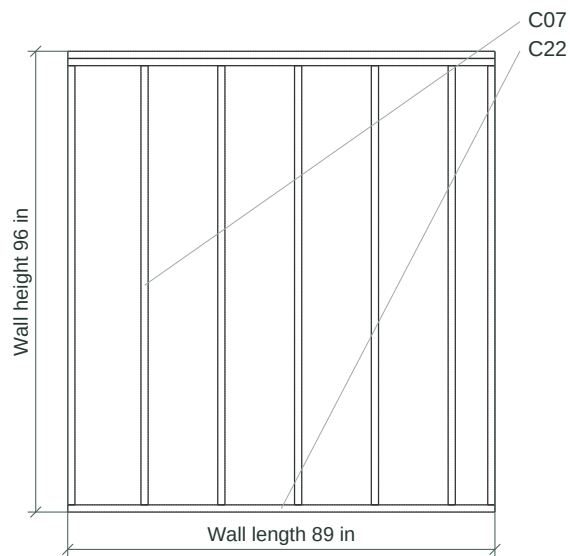

Scale check: this line is exactly 4 in on the page.


Construction drawings

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Shed Right sheathing

1:40 · imperial

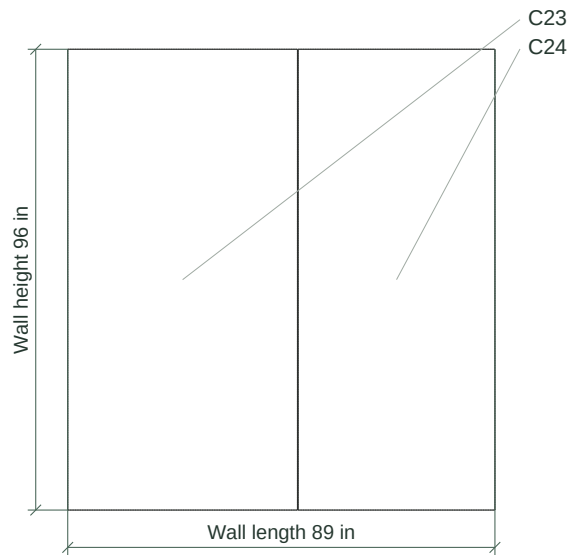


Roof framing plan

1:50 · imperial

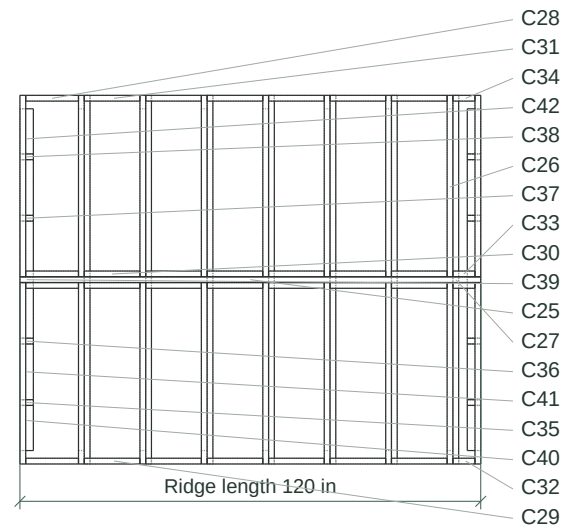


Gable roof elevation and bearing

1:40 · imperial

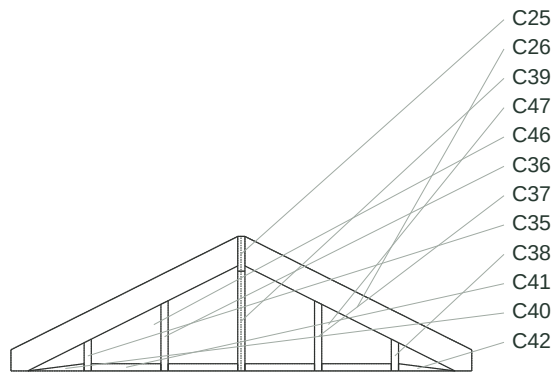

Rafter seat and tie detail

1:5 · imperial · detail of sheet 3

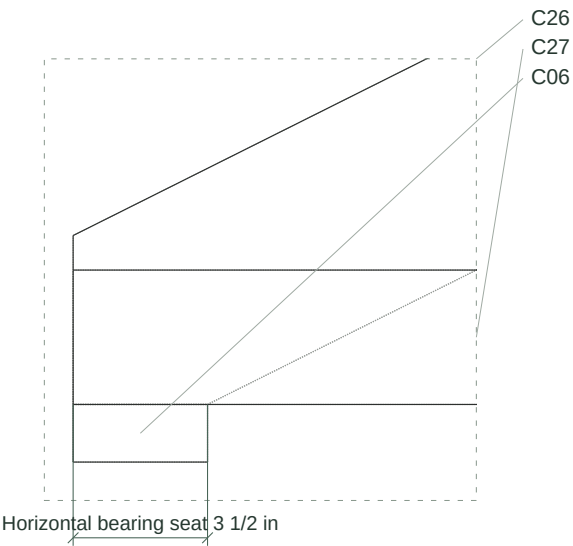

Scale check: this line is exactly 4 in on the page.

Print at 100% / Actual size. Do not fit to page.

Cut schedule

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

C-labels identify identical finished parts and cut recipes. Counts include every physical part. Member identities and original marks are in parts.csv. All blank dimensions use the part's local stock frame.

Cut types

Cut / stock	Qty	Typical part	Starting blank	Cut
C01/M01	2	Rim Front	120 in × 1 1/2 in × 5 1/2 in	Square cut
C02/M01	9	Joist Start Full	1 1/2 in × 93 in × 5 1/2 in	Square cut
C03/M02	2	Floor sheet 1.1	47 7/8 in × 96 in × 3/4 in	Panel cut
C04/M02	1	Floor sheet 3.1	24 in × 96 in × 3/4 in	Panel cut
C05/M06	2	Plate Bottom Start	42 in × 3 1/2 in × 1 1/2 in	Square cut
C06/M06	5	Plate Top 1	120 in × 3 1/2 in × 1 1/2 in	Square cut
C07/M06	30	Stud Start	1 1/2 in × 3 1/2 in × 91 1/2 in	Square cut
C08/M06	1	Stud At 16	1 1/2 in × 3 1/2 in × 91 1/2 in	D01
C09/M06	2	Door Jack Left	1 1/2 in × 3 1/2 in × 78 1/2 in	Square cut
C10/M07	1	Door Header	39 in × 3 1/2 in × 5 1/2 in	Square cut
C11/M06	2	Door Above At 48	1 1/2 in × 3 1/2 in × 7 1/2 in	Square cut
C12/M05	1	Sheathing 1.1	47 7/8 in × 1/2 in × 96 in	D02
C13/M05	1	Sheathing 2.1	47 7/8 in × 1/2 in × 96 in	D03
C14/M05	2	Sheathing 3.1	24 in × 1/2 in × 96 in	Panel cut
C15/M06	2	Window Jack Left	1 1/2 in × 3 1/2 in × 70 1/2 in	Square cut
C16/M07	1	Window Header	29 in × 3 1/2 in × 5 1/2 in	Square cut
C17/M06	1	Window Sill	26 in × 3 1/2 in × 1 1/2 in	Square cut
C18/M06	2	Window Above At 48	1 1/2 in × 3 1/2 in × 15 1/2 in	Square cut
C19/M06	2	Window Below At 48	1 1/2 in × 3 1/2 in × 33 in	Square cut
C20/M05	1	Sheathing 1.1	47 7/8 in × 1/2 in × 96 in	D04
C21/M05	1	Sheathing 2.1	47 7/8 in × 1/2 in × 96 in	D05
C22/M06	6	Plate Bottom Start	89 in × 3 1/2 in × 1 1/2 in	Square cut
C23/M05	2	Sheathing 1.1	47 7/8 in × 1/2 in × 96 in	Panel cut
C24/M05	2	Sheathing 2.1	41 in × 1/2 in × 96 in	Panel cut
C25/M11	1	Ridge	120 in × 1 1/2 in × 7 1/4 in	Square cut
C26/M01	18	Rafter Front Start	1 1/2 in × 55.5771 in × 5 1/2 in	D06
C27/M06	7	Tie At_16	1 1/2 in × 96 in × 3 1/2 in	Square cut
C28/M01	4	Blocking Front Eave Start	13 3/4 in × 1 1/2 in × 5 1/2 in	D07
C29/M01	6	Blocking Front Eave At_16	14 1/2 in × 1 1/2 in × 5 1/2 in	D08

Scale check: this line is exactly 4 in on the page.

Cut types — continued

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

Cut / stock	Qty	Typical part	Starting blank	Cut
C30/M01	12	Blocking Front Ridge At_16	14 1/2 in × 1 1/2 in × 5 1/2 in	D07
C31/M01	6	Blocking Back Eave At_16	14 1/2 in × 1 1/2 in × 5 1/2 in	D09
C32/M01	1	Blocking Front Eave At_112	5 3/4 in × 1 1/2 in × 5 1/2 in	D08
C33/M01	2	Blocking Front Ridge At_112	5 3/4 in × 1 1/2 in × 5 1/2 in	D07
C34/M01	1	Blocking Back Eave At_112	5 3/4 in × 1 1/2 in × 5 1/2 in	D10
C35/M06	2	Gable Left At_16	3 1/2 in × 1 1/2 in × 6 5/8 in	D11
C36/M06	2	Gable Left At_32	3 1/2 in × 1 1/2 in × 14 5/8 in	D12
C37/M06	2	Gable Left At_64	3 1/2 in × 1 1/2 in × 14 5/8 in	D13
C38/M06	2	Gable Left At_80	3 1/2 in × 1 1/2 in × 6 5/8 in	D14
C39/M06	2	Gable Left Ridge	3 1/2 in × 1 1/2 in × 20.7742 in	D15
C40/M06	2	Gable Left Base At_3_5	3 1/2 in × 11 3/4 in × 1 1/2 in	D16
C41/M06	8	Gable Left Base At_16_75	3 1/2 in × 14 1/2 in × 1 1/2 in	D17
C42/M06	2	Gable Left Base At_80_75	3 1/2 in × 11 3/4 in × 1 1/2 in	D18
C43/M10	2	Front roof panel 1	15 15/16 in × 52.8271 in × 1/2 in	Panel cut
C44/M10	12	Front roof panel 2	15 7/8 in × 52.8271 in × 1/2 in	Panel cut
C45/M10	2	Front roof panel 8	7 15/16 in × 52.8271 in × 1/2 in	Panel cut
C46/M05	2	Left gable panel 1	1/2 in × 47 7/8 in × 28.0242 in	D19
C47/M05	2	Left gable panel 2	1/2 in × 48 in × 28.0242 in	D20

Special cutting instructions

Detail	Instructions
D01	Bore 1/2 in diameter through. Center 3/4 in, 20 in from the local blank corner. Drill through the local Y direction.
D02	Cut door rectangle 5 7/8 in x 80 in; lower-left offset 42 in, 0 in on the sheet.
D03	Cut door rectangle 30 in x 80 in; lower-left offset 0 in, 0 in on the sheet.
D04	Cut window rectangle 7/8 in x 36 in; lower-left offset 47 in, 36 in on the sheet.
D05	Cut window rectangle 25 in x 36 in; lower-left offset 0 in, 36 in on the sheet.
D06	Cut both ends plumb at rise/run 0.5; horizontal run 47 1/4 in. The listed blank length includes the angled end cuts. Mark the seat line on the rectangular blank Y-Z face between (Y 0.7826 in, Z 1.5652 in) and (Y 3.9131 in, Z 0 in). Cut the seat between these marks; its assembled horizontal width is 3 1/2 in.
D07	Bevel the top edge from 3 1/2 in to 4 1/4 in high, rise/run 0.5.
D08	Bevel the top edge from 3 1/2 in to 4 1/4 in high, rise/run 0.5. Cut the underside housing to clear the adjacent rafter tie. Size 1 1/2 in x 1 1/2 in x 2.6008 in; local origin 0 in, 0 in, 0 in.

Scale check: this line is exactly 4 in on the page.

Special cutting instructions — continued

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

Detail	Instructions
D09	Bevel the top edge from 3 1/2 in to 4 1/4 in high, rise/run 0.5. Cut the underside housing to clear the adjacent rafter tie. Size 1 1/2 in x 1 1/2 in x 2.6008 in; local origin 13 in, 0 in, 0 in.
D10	Bevel the top edge from 3 1/2 in to 4 1/4 in high, rise/run 0.5. Cut the underside housing to clear the adjacent rafter tie. Size 1 1/2 in x 1 1/2 in x 2.6008 in; local origin 4 1/4 in, 0 in, 0 in.
D11	Cut the upper end to 5 7/8 in on one edge and 6 5/8 in on the other.
D12	Cut the upper end to 13 7/8 in on one edge and 14 5/8 in on the other.
D13	Cut the upper end to 14 5/8 in on one edge and 13 7/8 in on the other.
D14	Cut the upper end to 6 5/8 in on one edge and 5 7/8 in on the other.
D15	Cut the upper end to 20.7742 in on one edge and 20.7742 in on the other.
D16	Cut the base backing outline on the local Y-Z face. Join coordinates (0 in, 0 in); (11 3/4 in, 0 in); (11 3/4 in, 1 1/2 in).
D17	Cut the base backing outline on the local Y-Z face. Join coordinates (0 in, 0 in); (14 1/2 in, 0 in); (14 1/2 in, 1 1/2 in); (0 in, 1 1/2 in).
D18	Cut the base backing outline on the local Y-Z face. Join coordinates (0 in, 0 in); (11 3/4 in, 0 in); (0 in, 1 1/2 in).
D19	Transfer the gable outline from the elevation; cut the sloped top to fit the roof underside. Join coordinates (0 in, 0 in); (47 7/8 in, 0 in); (47 7/8 in, 28.0242 in); (47 1/4 in, 28.0242 in); (0 in, 4.3992 in).
D20	Transfer the gable outline from the elevation; cut the sloped top to fit the roof underside. Join coordinates (0 in, 0 in); (48 in, 0 in); (48 in, 4.3992 in); (3/4 in, 28.0242 in); (0 in, 28.0242 in).

Material purchases

Purchase	Quantity	Unit price	Saved quote	Amount
M09 · screws no8x1_5 · countersunk wood · gauge: #8 · length: 1 1/2 in	14 pack / 50 each	Missing		Missing
M07 · lumber 3 5x5 5 · softwood · 96 in · 3 1/2 in × 5 1/2 in	1 board	Missing		Missing
M01 · lumber 1 5x5 5 · softwood · 96 in · 1 1/2 in × 5 1/2 in	27 board	Missing		Missing
M12 · screws no8x1_5 · wood · gauge: #8 · length: 1 1/2 in	24 pack / 50 each	Missing		Missing
M04 · screws no8x2 · wood · gauge: #8 · length: 2 in	4 pack / 50 each	Missing		Missing
M03 · screws no12x4 · wood · gauge: #12 · length: 4 in	5 pack / 50 each	Missing		Missing
M01 · lumber 1 5x5 5 · softwood · 120 in · 1 1/2 in × 5 1/2 in	2 board	Missing		Missing
M06 · lumber 1 5x3 5 · softwood · 120 in · 1 1/2 in × 3 1/2 in	5 board	Missing		Missing
M11 · lumber 1 5x7 25 · softwood · 120 in · 1 1/2 in × 7 1/4 in	1 board	Missing		Missing

Scale check: this line is exactly 4 in on the page.

Material purchases — continued

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

Purchase	Quantity	Unit price	Saved quote	Amount
M08 · screws no10x3 · wood · gauge: #10 · length: 3 in	5 pack / 50 each	Missing		Missing
M02 · panel floor · plywood · 3/4 in thick · 48 in × 96 in sheet	3 sheet	Missing		Missing
M10 · panel roof · plywood · 1/2 in thick · 48 in × 96 in sheet	6 sheet	Missing		Missing
M05 · panel plywood · plywood · 1/2 in thick · 48 in × 96 in sheet	14 sheet	Missing		Missing
M06 · lumber 1 5x3 5 · softwood · 96 in · 1 1/2 in × 3 1/2 in	53 board	Missing		Missing

Known subtotal USD 0.00; tax 0.00; contingency 0.00. Total incomplete: missing quantities/prices are not zero.

Board cutting plan — repeat each row for its quantity

Plan	Qty	Stock section × length	Cuts in order; allow saw kerf	Reusable offcut
B01	1	M07 · 3 1/2 in × 5 1/2 in × 96 in	C10 (39 in) + C16 (29 in); kerf 1/8 in	27 3/4 in
B02	9	M01 · 1 1/2 in × 5 1/2 in × 96 in	C02 (93 in); kerf 1/8 in	2 7/8 in
B03	1	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C29 (14 1/2 in) + C30 (14 1/2 in) + C32 (5 3/4 in); kerf 1/8 in	5.1729 in
B04	2	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C31 (14 1/2 in) + C30 (14 1/2 in) + C33 (5 3/4 in); kerf 1/8 in	5.1729 in
B05	1	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C29 (14 1/2 in) + C30 (14 1/2 in) + C34 (5 3/4 in); kerf 1/8 in	5.1729 in
B06	4	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C29 (14 1/2 in) + C30 (14 1/2 in); kerf 1/8 in	11.0479 in
B07	4	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C31 (14 1/2 in) + C30 (14 1/2 in); kerf 1/8 in	11.0479 in
B08	2	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in) + C28 (13 3/4 in) + C28 (13 3/4 in); kerf 1/8 in	12.5479 in
B09	4	M01 · 1 1/2 in × 5 1/2 in × 96 in	C26 (55.5771 in); kerf 1/8 in	40.2979 in
B10	2	M01 · 1 1/2 in × 5 1/2 in × 120 in	C01 (120 in); kerf 1/8 in	0 in
B11	5	M06 · 1 1/2 in × 3 1/2 in × 120 in	C06 (120 in); kerf 1/8 in	0 in
B12	1	M11 · 1 1/2 in × 7 1/4 in × 120 in	C25 (120 in); kerf 1/8 in	0 in
B13	7	M06 · 1 1/2 in × 3 1/2 in × 96 in	C27 (96 in); kerf 1/8 in	0 in
B14	30	M06 · 1 1/2 in × 3 1/2 in × 96 in	C07 (91 1/2 in); kerf 1/8 in	4 3/8 in
B15	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C08 (91 1/2 in); kerf 1/8 in	4 3/8 in
B16	2	M06 · 1 1/2 in × 3 1/2 in × 96 in	C22 (89 in) + C35 (6 5/8 in); kerf 1/8 in	1/8 in
B17	2	M06 · 1 1/2 in × 3 1/2 in × 96 in	C22 (89 in) + C38 (6 5/8 in); kerf 1/8 in	1/8 in

Scale check: this line is exactly 4 in on the page.

Board cutting plan — repeat each row for its quantity — continued

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

Plan	Qty	Stock section × length	Cuts in order; allow saw kerf	Reusable offcut
B18	2	M06 · 1 1/2 in × 3 1/2 in × 96 in	C22 (89 in); kerf 1/8 in	6 7/8 in
B19	2	M06 · 1 1/2 in × 3 1/2 in × 96 in	C09 (78 1/2 in) + C18 (15 1/2 in); kerf 1/8 in	1 3/4 in
B20	2	M06 · 1 1/2 in × 3 1/2 in × 96 in	C15 (70 1/2 in) + C39 (20.7742 in); kerf 1/8 in	4.4758 in
B21	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C05 (42 in) + C05 (42 in) + C40 (11 3/4 in); kerf 1/8 in	0 in
B22	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C19 (33 in) + C19 (33 in) + C17 (26 in); kerf 1/8 in	3 5/8 in
B23	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C36 (14 5/8 in) + C37 (14 5/8 in) + C36 (14 5/8 in) + C37 (14 5/8 in) + C41 (14 1/2 in) + C41 (14 1/2 in) + C11 (7 1/2 in); kerf 1/8 in	1/8 in
B24	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C41 (14 1/2 in) + C41 (14 1/2 in) + C41 (14 1/2 in) + C41 (14 1/2 in) + C41 (14 1/2 in) + C41 (14 1/2 in) + C11 (7 1/2 in); kerf 1/8 in	5/8 in
B25	1	M06 · 1 1/2 in × 3 1/2 in × 96 in	C42 (11 3/4 in) + C40 (11 3/4 in) + C42 (11 3/4 in); kerf 1/8 in	60 3/8 in

Cut lengths are blank lengths. Kerf between cuts and before offcuts is included in the saved allocation. Do not substitute a smaller stock section. Allowances and purchase overrides are separate from the required cut counts.

Scale check: this line is exactly 4 in on the page.


Sheet cutting layouts

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Repeat each layout for its quantity. C-labels refer to the cut schedule; special cuts use the D-details. Dashed outlines are blanks, solid lines are finished edges. Preserve the specified kerf.

S01/M02 · 2 sheet(s) · 3/4 in



48 in × 96 in · 1:75
Kerf 1/8 in

S02/M02 · 1 sheet(s) · 3/4 in




48 in × 96 in · 1:75
Kerf 1/8 in

S03/M05 · 1 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S04/M05 · 1 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

S05/M05 · 2 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S06/M05 · 1 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S07/M05 · 1 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S08/M05 · 2 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

S09/M05 · 2 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

Scale check: this line is exactly 4 in on the page.


Sheet cutting layouts

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Repeat each layout for its quantity. C-labels refer to the cut schedule; special cuts use the D-details. Dashed outlines are blanks, solid lines are finished edges. Preserve the specified kerf.

S10/M10 · 1 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S11/M10 · 3 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S12/M10 · 1 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

S13/M10 · 1 sheet(s) · 1/2 in




48 in × 96 in · 1:75
Kerf 1/8 in

S14/M05 · 2 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

S15/M05 · 2 sheet(s) · 1/2 in



48 in × 96 in · 1:75
Kerf 1/8 in

Scale check: this line is exactly 4 in on the page.

Assembly sequence

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

1. Set and square the rims, then fasten the joists and seam blocking. Keep the stair opening clear where specified.

Cut types C01, C02. Drawings on sheet 1.

Assemble the rims and joists on a level bearing surface. Predrill and fasten each joist end with two #12 x 4 in wood screws. Frame and check the stair opening before decking.

Hardware: 36 × screws.no12x4.


2. Fit and fasten the numbered deck sheets, checking the seam supports and cutting the stair opening before use.

Cut types C03, C04. After step 1. Drawings on sheet 1.

Glue and screw the numbered floor panels to their named framing supports, with 1/8 in sheet gaps and #8 x 2 in screws at 6 in edges and 12 in intermediate supports.

Hardware: 180 × screws.no8x2.

Exploded: shed.floor.deck

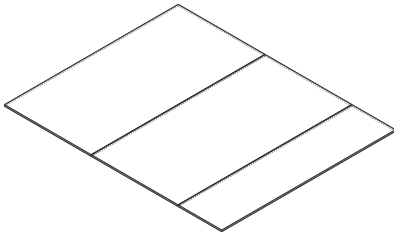

3. Cut and label each framing member. Set out the rough openings and member stations, assemble flat, then check both diagonals. Repeat for 4 assemblies.

Cut types C05, C06, C07, C08, C09, C10, C11, C15, C16, C17, C18, C19, C22. Drawings on sheet 1, 2.

Lay out the marked stations and rough openings. Clamp the frame square. Predrill and use two #10 x 3 in wood screws at each member end; fasten the second top plate at 16 in centers.

Hardware: 232 × screws.no10x3.

4. Attach the numbered sheathing panels. Preserve the deliberate opening cuts and leave the specified panel joints. Repeat for 4 assemblies.

Cut types C12, C13, C14, C20, C21, C23, C24. After step 3. Drawings on sheet 1, 2, 3.

Fit the numbered sheets with 1/8 in joints centered on framing. Transfer each rough opening from the frame before cutting. Predrill and fasten with #8 x 1 1/2 in wood screws at 6 in along supported edges and 12 in on intermediate framing.

Hardware: 684 × screws.no8x1_5.


Scale check: this line is exactly 4 in on the page.

Assembly sequence — illustrations


8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS


Exploded: shed.front.skin




Exploded: shed.back.skin



Exploded: shed.left.skin



Exploded: shed.right.skin



5. Raise, square and brace the four completed walls on the platform. Fasten the corners and confirm the door rough opening.

Cut types C05, C06, C07, C08, C09, C10, C11, C15, C16, C17, C18, C19, C22. After step 2, 3. Drawings on sheet 1.

Raise and brace each wall, fasten adjoining corner studs together, and fix the bottom plates through the deck into the rim or blocking below.

6. Label and pair the rafters. Erect the gable posts and ridge, then attach the rafters, ties and blocking. Verify full bearing before closing the roof.

Cut types C25, C26, C27, C28, C29, C30, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C41, C42. After step 5. Drawings on sheet 3.

Set the gable posts and ridge, then install matching rafter pairs with full seats on the top plates. Fasten each rafter tie to both rafter sides with three #12 x 4 in wood screws. Predrill and screw the end blocking into the rafters.

Hardware: 170 × screws.no12x4.

7. Install the numbered roof and gable sheets; retain every supported seam and cut line shown in the packet.

Cut types C43, C44, C45, C46, C47. After step 6. Drawings on sheet 3.

Install numbered roof and gable panels on the named framing. Leave 1/8 in sheet joints. Use #8 x 1 1/2 in screws at 6 in around supported edges and 12 in on intermediate framing.

Hardware: 1200 × screws.no8x1_5.

Scale check: this line is exactly 4 in on the page.


Print at 100% / Actual size. Do not fit to page.

Assembly sequence — illustrations

8 x 10 foot shed framing | Design ea44f082fc42 | Build 5182531c

REVIEW PACKET - SEE FINDINGS

Exploded: shed.roof.panels

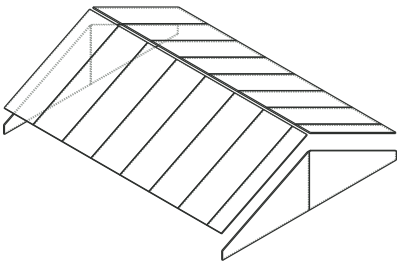

Review — Specify rated rafter-to-wall uplift connections for the site before construction. (shed.roof.connections.frame)

Review — Specify foundation bearing, ground anchorage, and wall hold-downs for the site. (shed.wall_floor)

Review — Prices or quantities are incomplete; missing values are not zero.

This packet details the frame and sheathing. Site foundation, load sizing, rated uplift/hold-down connections, roofing, flashing, cladding, door and window installation need project-specific details.

Member and fastener sizes in this study are fabrication inputs, not a structural analysis.

Saved estimate 3d440a71a53d9929344d80996ea72f0bf53027ecd51a46462504df4957096ad9. Price basis 91f8389ee47ce7b5173db427f2e18d307eeb27033c8ee66e61b98c1caed8ed39.

Sheet index

Sheet	Contents
1	Floor framing plan; Shed Front framing elevation; Shed Front sheathing; Shed Back framing elevation
2	Shed Back sheathing; Shed Left framing elevation; Shed Left sheathing; Shed Right framing elevation
3	Shed Right sheathing; Roof framing plan; Gable roof elevation and bearing; Rafter seat and tie detail
4	Cut schedule
5	Cut types — continued
6	Special cutting instructions — continued
7	Material purchases — continued
8	Board cutting plan — repeat each row for its quantity — continued
9	Sheet cutting layouts
10	Sheet cutting layouts
11	Assembly sequence
12	Assembly sequence — illustrations
13	Assembly sequence — illustrations

Scale check: this line is exactly 4 in on the page.